



09/29/00

10-02-00

A

Customer No. 20350

TOWNSEND and TOWNSEND and CREW LLP  
Two Embarcadero Center, 8<sup>th</sup> Floor  
San Francisco, California 94111-3834  
(415) 576-0200

**ASSISTANT COMMISSIONER FOR PATENTS**  
**BOX PATENT APPLICATION**  
**Washington, D.C. 20231**

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is the

- ☒ patent application of  
☐ continuation patent application of  
☐ divisional patent application of  
☐ continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Douglas Allan Davies

Attorney Docket No. 12755-052800US

Client Ref No. 53921/124

"Express Mail" Label No. EL623997152US

Date of Deposit: September 29, 2000

I hereby certify that this is being deposited with the United States  
Postal Service "Express Mail Post Office to Addressee" service  
under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents  
Washington, D.C. 20231

By:

*Sherry Barton*

For: WIRELESS TRANSMISSION EVALUATION SYSTEM AND METHOD

☐ This application claims priority from each of the following Application Nos./filing dates:

the disclosure(s) of which is (are) incorporated by reference.

☐ Please amend this application by adding the following before the first sentence: "This application is a ☐ continuation ☐ continuation-in-part of and claims the benefit of U.S. Provisional Application No. 60/\_\_\_\_\_, filed \_\_\_\_\_, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ 17 page(s) of specification  
☒ 6 page(s) of claims  
☒ 1 page of Abstract  
☒ 6 sheet(s) of ☐ formal ☒ informal drawing(s).  
☒ An assignment of the invention to Alcatel Networks Corporation  
☐ A ☐ signed ☐ unsigned Declaration & Power of Attorney  
☒ A ☒ signed ☐ unsigned Declaration.  
☒ A Power of Attorney.

A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 ☐ is enclosed ☐ was filed in the prior application and small entity status is still proper and desired.

A certified copy of a \_\_\_\_\_ application.

Information Disclosure Statement under 37 CFR 1.97.

A petition to extend time to respond in the parent application.

Notification of change of ☐ power of attorney ☐ correspondence address filed in prior application.

	(Col. 1)	(Col. 2)	
*FOR:	NO. FILED	NO. EXTRA	
BASIC FEE			
TOTAL CLAIMS	18 - 20	= *0	
INDEP. CLAIMS	3 - 3	= *0	
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED			

\* If the difference in Col. 1 is less than 0, enter "0" in Col. 2.

SMALL ENTITY		OR	OTHER THAN SMALL ENTITY	
RATE	FEE		RATE	FEE
	\$345.00	OR		\$690.00
x \$9.00 =		OR	x \$18.00 =	\$0.00
x \$39.00 =		OR	x \$78.00 =	\$0.00
+ \$130.00 =		OR	+ \$260.00 =	
TOTAL		OR	TOTAL	\$690.00

Please charge Deposit Account No. 20-1430 as follows:

- ☒ Filing fee \$ \$690.00  
☒ Any additional fees associated with this paper or during the pendency of this application.  
☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)

☐ A check for \$ \_\_\_\_\_ is enclosed.  
 2 extra copies of this sheet are enclosed.

Respectfully submitted,  
TOWNSEND and TOWNSEND and CREW LLP

*Robert J. Bennett*  
 Robert J. Bennett  
 Reg No.: 27,533  
 Attorneys for Applicant

Telephone:  
(415) 576-0200

Facsimile:  
(415) 576-0300

## **TITLE: WIRELESS TRANSMISSION EVALUATION SYSTEM AND METHOD**

### **FIELD OF THE INVENTION**

The invention relates generally to a system and method to test a wireless communication site for wireless communications with a base station and more specifically to a system and method to measure characteristics of wireless communication signals using a portable, adjustable antenna system.

### **BACKGROUND OF THE INVENTION**

Occasionally, it is neither practical nor desirable to connect users of a communication network using physical links, such as wires, cables or fibre links. Instead, a wireless communication network may be used to connect the communication network. In a typical wireless communication network, there is a base station communicating with subscriber stations. The base station typically has separate antennae for the receive and transmit functions.

A user at a subscriber station communicates with the base station using a fixed antenna at the user's communication site. Often there are a number of potential locations for the communication site that may be used. It is desirable to be able to determine the suitability of these communication sites without installing a fixed antenna at each site then testing each site.

### **SUMMARY OF INVENTION**

In a first aspect, the invention provides a signal testing system for evaluating wireless communication signals transmitted between a base station and a communication site. The signal testing system comprises an antenna located at the communication site for communicating the

wireless communication signals between the base station and the communication site, an adjustable mount associated with the antenna for orienting the antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom associated with the adjustable mount for positioning the antenna at a plurality of heights and a communication unit to measure characteristics of the wireless communication signals. The adjustable mount is fixed in a set pan orientation and a set tilt orientation and the adjustable boom is fixed at a set height when the communication unit measures the characteristics of the wireless communication signals.

The wireless testing system may receive wireless communication signals sent downstream from the base station to the testing system. The antenna may receive the wireless communication signals and the communication unit may receive the wireless communication signals from the antenna and may measure characteristics of the wireless communication signals.

The wireless testing system may transmit wireless communication signals upstream to the base station from the testing system. The communication unit may generate the wireless communication signals. The antenna may transmit the wireless communication signals to the base station. The communication unit may measure characteristics of the wireless communication signals.

The wireless testing system may have the communication unit comprising a signal measurement device to measure characteristics of the wireless communication signals communicated with the base station and a modem to process the wireless communication signals communicated with the base station. The wireless testing system may further have the signal measurement device as a signal analyzer integrating power signals around frequencies associated with the wireless communication signals. The wireless testing system may still further have modem as a network interface unit. The wireless testing system may still further have the

communication unit further comprising a coupler connected to the antenna to direct the wireless communication signals and have the signal measurement device connected to the coupler and the modem connected to the coupler. The wireless testing system may still further transmit the wireless communication signals upstream to the base station with the modem generating the wireless communication signals, the wireless communication signals being provided to the antenna, the antenna transmitting the wireless communication signals and the signal analyzer measuring characteristics of the wireless communication signals. Alternatively, the wireless testing system may still further receive the wireless communication signals sent downstream from the base station to the testing system, with the antenna receiving the wireless communication signals, the wireless communication signals being provided to the modem and the signal analyzer unit measuring characteristics of the wireless communication signals.

The wireless testing system may further comprise a controller to orient the mount in one of the plurality of pan orientations and one of the plurality of tilt orientations.

The wireless testing system may further comprise a bracket attached to the antenna, the bracket allowing positioning of the antenna at a plurality of angles along a plane to change a polarity of the wireless communication signals sent between the base station and the wireless testing system.

The wireless testing system may further have an attenuator in the communication unit to selectively attenuate the wireless communication signals to produce attenuated signals simulating attenuating effects of ambient atmospheric and meteorological conditions around the communication site. The wireless testing system may still further have the attenuator providing the attenuated signal to the coupler.

In a second broad aspect, the invention provides a method of evaluating wireless communication signals communicated between a wireless testing system and a base station. The wireless testing system comprises an antenna for communicating the wireless communication signals with the base station, an adjustable mount associated with the antenna for orienting the antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom attached to the adjustable mount for positioning the antenna at a plurality of heights and a communication unit associated with the antenna. The method of evaluating wireless communication signals comprises positioning the antenna at a set height, at a set pan position and a set tilt position and evaluating the characteristics of the wireless communication signals by integrating power signals of the wireless communication signals across a frequency band associated with the wireless communication signals.

The method of evaluating wireless communication signals may further comprise variably attenuating the wireless communication signals before evaluating the characteristics of the wireless communication signals to simulate ambient atmospheric and meteorological conditions around the wireless testing system. The method may still further comprise evaluating the characteristics of the wireless communication signals transmitted by the wireless testing system to the base station. Alternatively, the method may further comprise evaluating the characteristics of the wireless communication signals received by the wireless testing system from the base station.

In a third broad aspect, the invention provides a method of simulating ambient atmospheric and meteorological conditions for a wireless communication system using a wireless testing system. The wireless testing system comprises an antenna for communicating the wireless communication signals with the base station, an adjustable mount associated with

the antenna for orienting the antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom attached to the adjustable mount for positioning the antenna at a plurality of heights, a signal measuring device associated with the antenna and a signal attenuator associated with the antenna. The method comprises positioning the antenna at a set height of the plurality of heights, at a set pan of the plurality of pan orientations and at a set tilt of the plurality of tilt orientations, evaluating characteristics of the wireless communication signals transmitted by the base station and received by the signal measuring device, attenuating the wireless communication signals until the signal measuring device no longer receives the wireless communication signals transmitted by the base station, calculating the atmospheric and meteorological conditions corresponding to the amount of attenuation based on the distance between the antenna and the base station and comparing the calculations of the atmospheric and meteorological conditions to a predetermined threshold level required to maintain a level of service required for communications with the base station when the atmospheric and meteorological conditions exist. If the level of attenuation exceeds the threshold level, the antenna placement at the communication site is acceptable.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

The foregoing and other aspects of the invention will become more apparent from the following description of specific embodiments thereof and the accompanying drawings which illustrate, by way of example only, the principles of the invention. In the drawings, where like elements feature like reference numerals (and wherein individual elements bear unique alphabetical suffixes):

- Fig. 1 is a block diagram of a wireless communication network comprising a base station transmitting to a plurality of subscriber stations located at different communication sites;
- Fig. 1a is a block diagram of a communication site of Fig. 1;
- Fig. 2 is a block diagram of a communication site of Fig. 1 utilizing a testing system embodied in the invention;
- Fig. 3 is a diagram providing further detail of a mount and an antenna of the testing system of Fig. 2;
- Fig. 4a is a block diagram of one orientation of the antenna on the mount of Fig. 3;
- Fig. 4b is a block diagram of another orientation of the antenna on the mount of Fig. 3;
- Fig. 5 is a block diagram providing further detail of the testing system of Fig. 2;
- Fig. 6 is a power to frequency graph of representative wireless communication signal measurements for communication sites using the testing system of Fig. 2;
- Fig. 7 is a schematic of an angular and distance relationships of a transmit antenna and a receive antenna at a base station with an antenna of the testing system of Fig. 2;
- Fig. 8 is a block diagram of the testing system of Fig. 2 including a signal attenuator;
- Fig. 9 is a block diagram providing further detail of the signal attenuator of Fig. 8; and
- Fig. 10 is a block diagram of a casing containing the testing system of Fig. 2.

## DETAILED DESCRIPTION OF EMBODIMENTS

The description which follows, and the embodiments described therein, are provided by way of illustration of an example, or examples, of particular embodiments of the principles of the

present invention. These examples are provided for the purposes of explanation, and not limitation, of those principles and of the invention. In the description which follows, like parts are marked throughout the specification and the drawings with the same respective reference numerals.

Referring to Fig. 1, wireless communication system 1 comprises base station 100 and a plurality of subscriber stations 102 at communication sites 104a, 104b and 104c. Each subscriber station 102 communicates with base station 100 via wireless communication signals. Base station 100 has a receive antenna 106 to receive wireless communication signals from subscriber stations 102 and a transmit antenna 108 to transmit wireless communication signals to subscriber stations 102. It can be appreciated that receive antenna 106 and transmit antenna 108 may be physically incorporated into a single antenna (not shown).

For signal transmission direction convention, wireless communication signals sent from base station 100 to subscriber station 102 are sent in a “downstream” direction and wireless communication signals sent from subscriber station 102 to base station 100 are sent in an “upstream” direction.

In wireless communication system 1, base station 100 or subscriber station 102 may be connected to their respective antennas via coaxial cable. Wireless communication signals used in system 1 are transmitted on frequencies in range of 24 GHz to 38 GHz. For a given wireless communication system, the frequency range used depends on legal and administrative regulations, including spectral licensing requirements established by any governmental bodies or agencies which regulate wireless communications in a country or region.

Since frequencies in the 24 GHz to 38 GHz frequency range are generally too high to be transmitted over coaxial cable, an intermediate frequency (IF) is used as a carrier. Depending on

the radio frequency (RF) to be transmitted, the IF varies, but is generally in the range of 400 to 1000 MHz for the upstream and 1000 to 2000 MHz in the downstream. Within the selected IF, communication signals may be transmitted within a particular continuous band of frequencies. For downstream communications, the band is typically 36 MHz wide; for upstream communications, the band is typically 9 MHz wide. These ranges can be expanded if there is available space in the spectrum. The IF transmission is upconverted to the appropriate RF range by the transmit radio prior to broadcast. The incoming RF signal is downconverted by the receive radio prior to being sent along the coaxial cable. Accordingly, by measuring power of signals in the IF range received at communication sites 104, a measurement may be made of the strength of the wireless communication signals received thereat.

Referring to Fig. 1a, each subscriber station 102 comprises antenna 110 and communication station 112. When base station 100 (not shown) transmits wireless communication signals to a subscriber station 102, antenna 110 receives the wireless communication signals and transmits them through a connection to communication station 112. When communication station 112 generates a message to be transmitted from subscriber station 102 to base station 100, communication station 112 transmits the message through a connection to antenna 110 which in turn converts the message to a wireless communication signal which is transmitted to base station 100.

Referring to Fig. 2, the embodiment comprises wireless testing system 200 which may be located at communication site 104. Wireless testing system 200 provides a portable system and method of evaluating communication signals between base station 100 and communication site 104 without using subscriber station 102. Accordingly, it can be appreciated that transmission

characteristics of wireless communication signals received at communication site 104 may be evaluated without deploying subscriber station 102 at communication site 104.

Wireless testing system 200 comprises antenna 202, mount 204, boom 206 and communication unit 208. Wireless communication signals are received and transmitted from antenna 202 to base station 100 (not shown). Signals received and transmitted by antenna 202 are provided to or generated by communication unit 208, through connection 210. Communication unit 208 includes components which provide measurement of transmission characteristics of the received signals, including power and frequency measurements.

Antenna 202 is attached to mount 204. Mount 204 is attached to boom 206. Boom 206 is adjustable to a plurality of heights and may have height demarcations thereon enabling an operator to determine the set height of boom 206. Boom 206 is extended to a height to provide antenna 202 with a line of sight to receive antenna 106 and transmit antenna 108 of base station 100. As wireless transmissions propagate and reflect in straight lines, having a line of sight between a transmitter antenna and a receiver antenna ensures that communications therebetween have the best potential for reception for those locations. In the embodiment, boom 206 has a system of one or more adjustable legs 212 allowing boom 206 to be adjusted to a level vertical position on uneven ground. In the embodiment boom 206 is a light stand, such as Model 126 U from Manfrotto of Germany.

Referring to Fig. 3, mount 204 allows positioning of antenna 202 in a plurality of pan and tilt orientations for antenna 202. Mount 204 may have pan and tilt gradation indicators thereon to enable an operator to record the current pan and tilt settings of mount 204. In the embodiment, mount 204 is a pan and tilt servo unit, such as Model PT680-24P available from Pelco of Clovis, California, U.S.A. Mount 204 is positioned by a powered controller 300,

adjusting the pan, as shown by arrow 302 and tilt, as shown by arrow 304, of antenna 202 remotely about boom 206. In the embodiment, powered controller 300 is a remote joystick controller, such as model MPT24DT, also available from Pelco. Powered controller 300 allows remote adjustment of the pan and tilt of antenna 202 when the aspects of the wireless signal are measured.

Referring to Figs. 4a-4b, antenna 202 may be attached to mount 204 with bracket 400. Bracket 400 allows antenna 202 to be rotated about mount 204, thereby changing the relative polarity of transmissions sent from antenna 202 to base station antenna 106. It will be appreciated that the rotation of antenna 202 about mount 204 still maintains antenna 202 at a set plane relative to said base station 100, which is determined by the pan and tilt orientation of mount 204. In Fig. 4a, antenna 202 is oriented in a fully upright manner as indicated by arrow 402. In Fig. 4b, antenna 202 is oriented in a manner 90° from the orientation shown in Fig. 4a per arrow 404. Accordingly, transmissions from antenna 202 using the orientation of Fig. 4b are polarized with transmissions from antenna 202 having an orientation as shown in Fig. 4a.

Referring to Fig. 5, signals received by antenna 202 are transmitted to communication unit 208. Communication unit has directional coupler 502, Network Interface Unit 504 and spectrum analyzer 506. Directional coupler 502 splits the signals received to provide one signal tap to Network Interface Unit (NIU) 504 and another signal tap to spectrum analyzer 506. It can be appreciated that while directional coupler 502 may degrade signals received, the quantity of the degradation of the signals received is known. Accordingly, measurements of signals received may be adjusted to account for signal degradations produced by directional coupler 502.

Essentially, NIU 504 is a radio modem having multiple interfaces to process different communication protocols. In processing wireless communication signals, NIU 504 receives

signals from base station 100 and demodulates the received signals into T1, ethernet or OC3 traffic streams. NIU 504 also generates messages for transmitting to base station 100 by receiving T1, ethernet or OC3 traffic and modulating the transmitted signals such that it may be transmitted wirelessly over a radio link several kilometres long. In the embodiment, NIU 504 may be modem model 28110 (providing T1 with ethernet communications), model 28130 (providing quad T1 with ethernet communications) or model 28180 (providing OC3 with ethernet communications), all available from Alcatel Networks Corporation of Kanata, Ontario, Canada. The generated messages are transmitted through connections to directional coupler 502 then to antenna 202. Antenna 202 converts the generated message to a wireless signal and transmits the wireless signal to base station 100. It can be appreciated that a bi-directional connection may be used between antenna 202 and directional coupler 502 and between NIU 504 and directional coupler 502 to transmit generated signal received from and transmitted to base station 100.

Characteristics of wireless communication signals received from base station 100 and generated by NIU 504 are measured by transmitting the signals received through directional coupler 502 to spectrum analyzer 506. It will be appreciated that various signal measurement devices may be used, as appropriate, in addition to spectrum analyzer 506. In the embodiment, spectrum analyzer 506 is a HP 8564E 40 GHz spectrum analyzer from Hewlett-Packard of Palo Alto, California, U.S.A.

In the embodiment, spectrum analyzer 506 can only be connected to monitor either the wireless communication signals received by NIU 504 or the wireless communication signals transmitted from NIU 504 at one time. Accordingly, spectrum analyzer 506 is shown unconnected. To measure aspects of wireless communication signals received by NIU 504,

downstream connection 508 is connected with spectrum analyzer 506. To measure aspects of wireless communication signals transmitted by NIU 504, upstream connection 510 is connected with spectrum analyzer 506. It can be appreciated that a switching device may be used to switch between measuring wireless communication signals received by NIU 504 and wireless communication signals transmitted from NIU 504.

Referring to Fig. 6, when wireless testing system 200 is deployed at communication site 104 as described earlier, spectrum analyzer 506 can be used to measure characteristics of the wireless communication signals received and transmitted by NIU 504. To make a measurement, power signals are integrated over a frequency band to provide information relating to the total power received at the communication site.

As described earlier, downstream and upstream communication signals are transmitted in a selected range in an IF band. Frequency response curves 600a-600c provide representative power to frequency signals around center frequency 602 received from base station 100 by testing system 200 at various communication sites 104. As downstream signals are measured, center frequency 602 may be 1.0 GHz. As can be seen in curves 600a-600c, each curve has a “bump” representing the power in modulated signals received in the transmission carrier bandwidth 604. As downstream signals are measured, carrier bandwidth 604 is 36 MHz wide centered on 1.0 GHz. The larger the amplitude of the “bump”, the more power has been received in the communication signal. Accordingly, curve 600b has power measurements that exceed power measurements over curves 600a and 600c. Accordingly, of the three measurements taken for the three different sites, the site associated with curve 600b, with the tested location, height, pan and tilt settings of testing system 200 should be selected as the final site for a subscriber station.

It can be appreciated that the optimum communication site would generally provide the best IF measurement. For each potential communication site, operator of testing system 200 may record the height of boom 206, the pan and tilt orientations of antenna 202 and the exact geographic location of antenna 202 using an appropriate global positioning system.

It can be appreciated that a similar set of measurements may be made when measuring upstream communication signals from various sites.

Referring to Fig. 5, testing system 200 may also evaluate upstream wireless communication signals. When wireless testing system 200 transmits wireless communication signals to base station 100, base station 100 may instruct NIU 504 via signals encoded in downstream wireless transmissions to communication station 120 to decrease the power of the wireless communication signals transmitted to conform to ideal power characteristics of wireless communication signals received by base station 100. This instruction is transmitted from base station 100 to NIU 504 through antenna 202.

Referring to Fig. 6, in an upstream communication signal measurement configuration, upstream communication signals may have an IF center frequency 602 of 500 MHz and a carrier bandwidth of 9 MHz. As upstream communication signals are measured, ideal transmission characteristics are that less power is used in transmissions. Therefore, for upstream communication signals at various communication sites 104, the signal having the lowest power over the carrier bandwidth is preferred. Accordingly, curve 600c represents the lowest power and the site associated with curve 600c is preferable for upstream communications.

Referring to Fig. 7, antenna 202 used in the embodiment has a narrow beamwidth and a high-gain antenna. Wireless communication signals received by antenna 202 may lose 3 dB of signal strength when the received wireless signal is off-center from antenna 202 by 1.5° and 15

dB when off-center by 3°. When receive antenna 106 and transmit antenna 108 at base station 100 are positioned relatively close together, the horizontal beam width of antenna 202 in wireless testing system 200 may typically both receive wireless communication signals from and transmit wireless communication signals to base station 100.

The maximum relative lateral distance between receive antenna 106 and transmit antenna 108 that allows antenna 202 to communicate with both antennas 106 and 108 is determined by  $\alpha$  angle 700.  $\alpha$  angle 700 is the angle at antenna 202 made between receive antenna 106 and transmit antenna 108 and quantifies the azimuth between receive antenna 106 and transmit antenna 108 relative to antenna 202. Angle 700 is a function of  $l$  length 702 between the receive antenna 106 and the transmit antenna 108 and  $d$  distance 704 of antenna 202 from base station 100. The relationship can be expressed as:

$$\tan \alpha = l/d \quad (\text{Equation 1})$$

If  $\alpha$  angle 700 in Equation 1 is not sufficiently small, antenna 202 may not be able to simultaneously receive and transmit wireless communication signals with base station 100.

Typically, if  $\alpha$  angle 700 exceeds 1.5°, both receive and transmit antennas 106 and 108 of communication site 104 will not be within the half power points of the antenna pattern from base station 100. Accordingly, either the transmit or the receive path will be degraded. Since the fade margin is determined by the weakest link, the antenna must be adjusted to equalize both paths.

In a more general situation when subscriber antenna 110 is not perpendicular to the line between the receive and transmit antenna,  $\alpha$  angle 700 may exceed the half power points of the antenna 110. The testing system 200 may be used to determine the optimal position of antenna 110 based on the receive and transmit signal strengths measured at the NIU 504.

It will be appreciated that antenna 202 may have similar directional issues for elevation differences between receive antenna 106 and transmit antenna 108 when both are located at base station 100, but not at the same height. Using Equation 1,  $d$  distance 704 is the distance of receive antenna 106 from antenna 202 and  $l$  length 702 is the height differential of the distance of antenna 202 to either receive antenna 106 or to transmit antenna 108. Use of Equation 1 to determine a maximum height differential follows the use of Equation 1 to determine a maximum allowable lateral differential, as described earlier.

It will be appreciated that in some circumstances, there may be both differential height and lateral distance issues with receive antenna 106 and transmit antenna 108.

The embodiment allows the antenna 202 to be set at several positions at several sites while testing for optimal fade margin in each position. The fade margin of wireless communication signals received by NIU 504 with the signals transmitted by NIU 504 may be equalized by adjusting the pan and tilt of antenna 202 through powered controller 300. The signal characteristics of the transmitted and received wireless signals are alternately monitored by spectrum analyzer 506 while adjusting the pan and tilt of antenna 202 until the fade margin of the wireless signals are equalized. Equalizing the fade margin of the wireless signals ensures continued communications with base station 100 if atmospheric and meteorological conditions which may interfere with wireless signals would cause only the weaker of the transmitted or received wireless signals to be lost. Since the weaker wireless signal is the limiting factor for communications with base station 100, equalized wireless signals ensure a higher level of reliability for communications with base station 100 when conditions would interfere with the wireless signals transmitted.

Referring to Fig. 8, another aspect of the embodiment has attenuator 800 to simulate ambient atmospheric and meteorological conditions on wireless communication signals in wireless testing system 200. For example, atmospheric and meteorological conditions such as ambient rain fog and snow, may absorb and reflect wireless communication signals transmitted from antenna 106 thereby decreasing the strength of the signal received at antenna 202. In operation, such atmospheric and meteorological ambient conditions may have the effect of attenuating wireless signals by 20dB or more. Antenna 202 transmits wireless communication signals received from base station 100 through a connection to attenuator 800. Attenuator 800 may then be adjusted to attenuate the signals in the connection. These attenuated signals are then sent to directional coupler 502. Accordingly, attenuated signals may be evaluated by spectrum analyzer 506.

Referring to Fig. 9, attenuator 800 can attenuate incrementally the wireless signal using control dials 900 and 902, which are connected to individual signal attenuator modules (not shown). 10 dB attenuation increments are provided by dial 900 and 1dB attenuation increments are provided by dial 902. Attenuator 800 may comprise commercial signal attenuators known in the art such as HP 8494B and HP 8495B, both available from Hewlett-Packard of Palo Alto, California, U.S.A.

Attenuator 800 may be used to determine the amount of attenuation the wireless signal can withstand before the wireless testing system 200 can no longer communicate with the base station 100. The amount of attenuation that testing system 200 may be required to withstand depends on the rate of rainfall in the geographic location being tested and the proximity, azimuth and elevation of testing system 200 to base station 100.

At that point, the level of attenuation is compared against known threshold levels of atmospheric and meteorological conditions antenna placement at the communication site must withstand to maintain communications with base station 100 if a permanent wireless station were to be placed at communication site 104. For example, in the system by this embodiment, the level of attenuation the wireless testing system must withstand to maintain a reasonable level of service for a permanent wireless station, taking into account the attenuation of the elements in the wireless testing system 200, is 30 dB. If the level of attenuation recorded exceeds this threshold level, a permanent wireless station with the same pan, tilt and height of antenna 202 will maintain a reasonable level of service at communication site 104.

Ideally, subscriber antenna 110 should receive attenuated power from base station 100 to most accurately reflect effects of rain in attenuating downstream wireless signals. However, this would require decreasing the output power at base station 100, thereby affecting other customers on a live network. Accordingly, attenuator 800 may be used in lieu of reducing transmission power at base station 100.

Referring to Fig. 10, wireless testing station 102, spectrum analyzer 506, network interface unit 210 and attenuator 800 may be housed in casing 1000 to provide portability for the wireless testing system 200. It can be appreciated that the mobile nature of the wireless testing system 200 is enhanced by having fewer individual pieces of equipment to move between communication sites 104a, 104b and 104c.

It is noted that those skilled in the art will appreciate that various modifications of detail may be made to the embodiments described herein, which would come within the spirit and scope of the invention as defined in the following claims.

## CLAIMS

We claim:

1. A signal testing system for evaluating wireless communication signals transmitted between a base station and a communication site, said signal testing system comprising:
  - an antenna located at said communication site for communicating said wireless communication signals between said base station and said communication site;
  - an adjustable mount associated with said antenna for orienting said antenna in a plurality of pan orientations and a plurality of tilt orientations;
  - an adjustable boom associated with said adjustable mount for positioning said antenna at a plurality of heights; and
  - a communication unit to measure characteristics of said wireless communication signals,wherein said adjustable mount is fixed in a set pan orientation of said plurality of pan orientations and a set tilt orientation of said plurality of tilt orientations and said adjustable boom is fixed at one of said plurality of heights when said communication unit measures said characteristics of said wireless communication signals.
2. A wireless testing system as claimed in claim 1, wherein said testing system receives wireless communication signals sent downstream from said base station to said testing system, said antenna receives said wireless communication signals and said communication unit receives said wireless communication signals from said antenna and measures characteristics of said wireless communication signals.

3. A wireless testing system as claimed in claim 1, wherein said testing system transmits wireless communication signals sent upstream to said base station from said testing system, said communication unit generates said wireless communication signals, said antenna transmits said wireless communication signals to said base station and said communication unit measures characteristics of said wireless communication signals.
4. The wireless testing system as in claim 1, wherein said communication unit comprises  
a signal measurement device to measure characteristics of said wireless communication signals communicated with said base station; and  
a modem to process said wireless communication signals communicated with said base station.
5. A wireless testing system as claimed in claim 4, wherein said signal measurement device is a signal analyzer integrating power signals around frequencies associated with said wireless communication signals.
6. A wireless testing system as claimed in claim 5, wherein said modem is a network interface unit.
7. The wireless testing system as claimed in claim 6, wherein said communication unit further comprises a coupler connected to said antenna to direct said wireless communication signals and

wherein said signal measurement device is connected to said coupler and said modem is connected to said coupler.

8. A wireless testing system as claimed in claim 7, wherein said testing system transmits said wireless communication signals sent upstream to said base station, said modem generates said wireless communication signals, said wireless communication signals are provided to said antenna, said antenna transmits said wireless communication signals and said signal analyzer measures characteristics of said wireless communication signals.
9. A wireless testing system as claimed in claim 7, wherein said testing system receives wireless communication signals sent downstream from said base station to said testing system, said antenna receives said wireless communication signals, said wireless communication signals are provided to said modem and said signal analyzer unit measures characteristics of said wireless communication signals.
10. A wireless testing system as claimed in claim 1, further comprising a controller to orient said mount in one of said plurality of pan orientations and one of said plurality of tilt orientations.
11. A wireless testing system as claimed in claim 1, further comprising a bracket attached to said antenna, said bracket allowing the positioning of said antenna at a plurality of angles along a plane to change a polarity of said wireless communication signals sent between

said base station and said wireless testing system, said plane determined by said pan position and said set tilt position of said mount.

12. A wireless testing system as claimed in claim 7 further comprising an attenuator in said communication unit to selectively attenuate said wireless communication signals to produce attenuated signals simulating attenuating effects of ambient atmospheric and meteorological conditions around said communication site.
13. A wireless testing system as claimed in claim 12 wherein said attenuator provides said attenuated signal to said coupler.
14. A method of evaluating wireless communication signals communicated between a wireless testing system and a base station, said wireless testing system comprising an antenna for communicating said wireless communication signals with said base station, an adjustable mount associated with said antenna for orienting said antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom attached to said adjustable mount for positioning said antenna at a plurality of heights and a communication unit associated with said antenna, said method of evaluating wireless communication signals comprising:
  - positioning said antenna at a set height of said plurality of heights, at a set pan of said plurality of pan orientations and at a set tilt of said plurality of tilt orientations; and

evaluating said characteristics of said wireless communication signals by  
integrating power signals of said wireless communication signals across a  
frequency band associated with said wireless communication signals.

15. A method of evaluating wireless communication signals as claimed in claim 14, further comprising variably attenuating said wireless communication signals before evaluating said characteristics of said wireless communication signals to simulate ambient atmospheric and meteorological conditions around said wireless testing system.
16. A method of evaluating wireless communication signals as claimed in claim 14, further comprising evaluating said characteristics of said wireless communication signals transmitted by said wireless testing system to said base station.
17. A method of evaluating wireless communication signals as claimed in claim 14, further comprising evaluating said characteristics of said wireless communication signals received by said wireless testing system from said base station.
18. A method of simulating ambient atmospheric and meteorological conditions for a wireless communication system using a wireless testing system, said wireless testing system comprising an antenna for communicating said wireless communication signals with said base station, an adjustable mount associated with said antenna for orienting said antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom attached to said adjustable mount for positioning said antenna at a plurality of

heights, a signal measuring device associated with said antenna and a signal attenuator associated with said antenna, said method comprising:

positioning said antenna at a set height of said plurality of heights, at a set pan orientation of said plurality of pan orientations and at a set tilt orientation of said plurality of tilt orientations; and

evaluating characteristics of said wireless communication signals transmitted by said base station and received by said signal measuring device;

attenuating said wireless communication signals until said signal measuring device no longer receives said wireless communication signals transmitted by said base station;

calculating said atmospheric and meteorological conditions corresponding to said amount of attenuation based on the distance between said antenna and said base station; and

comparing said calculations of said atmospheric and meteorological conditions to a predetermined threshold level required to maintain a level of service required for communications with said base station when said atmospheric and meteorological conditions exist;

wherein, if said level of attenuation exceeds said threshold level, said antenna placement at said communication site is acceptable.

## ABSTRACT

A signal testing system and method for evaluating wireless communication signals transmitted between a base station and a communication site is provided. The signal testing system comprises an antenna located at the communication site for communicating the wireless communication signals between the base station and the communication site, an adjustable mount associated with the antenna for orienting the antenna in a plurality of pan orientations and a plurality of tilt orientations, an adjustable boom associated with the adjustable mount for positioning the antenna at a plurality of heights and a communication unit to measure characteristics of the wireless communication signals. The adjustable mount is fixed in a set pan orientation and a set tilt orientation and the adjustable boom is fixed height when the communication unit measures the characteristics of the wireless communication signals. The method uses the system.

20801716.4

Communication Site 104a

Communication Site 104b

Communication Site 104c

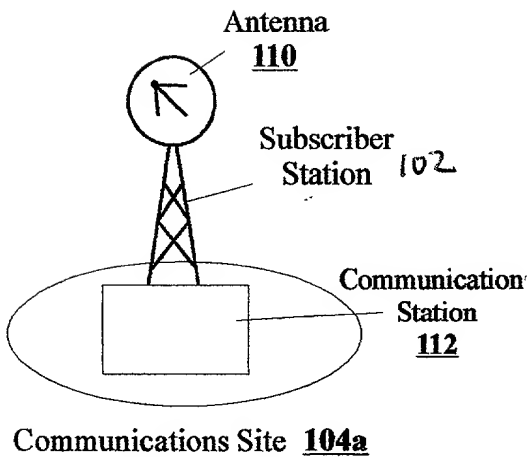
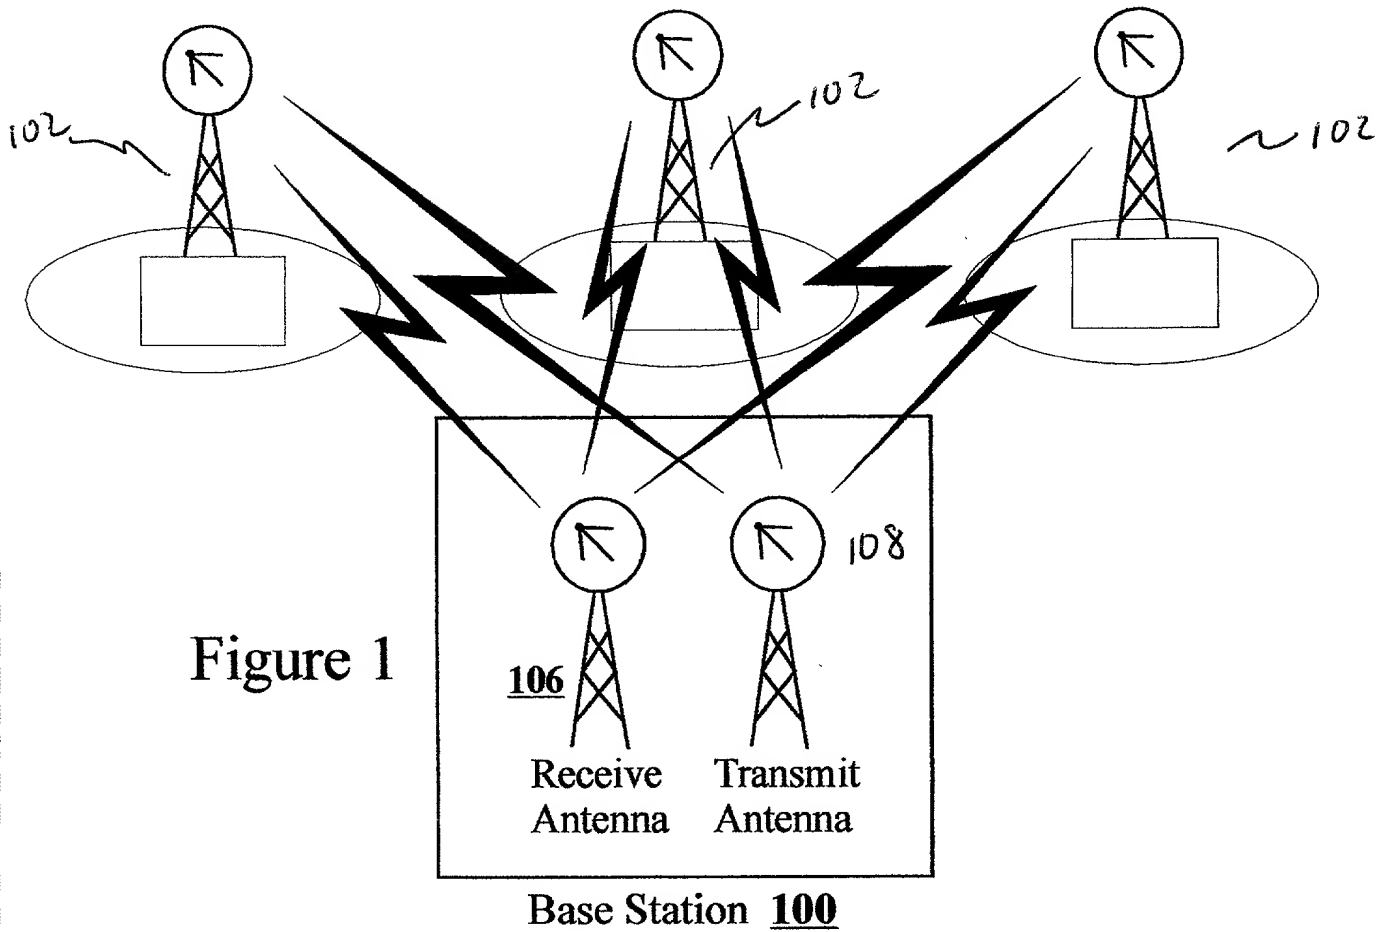


Figure 1a




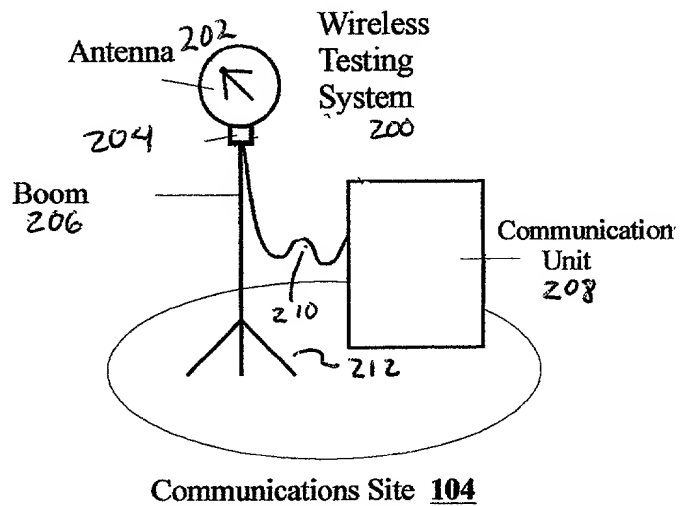


Figure  
2

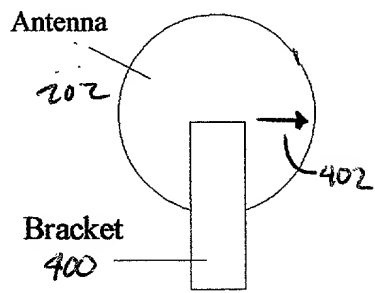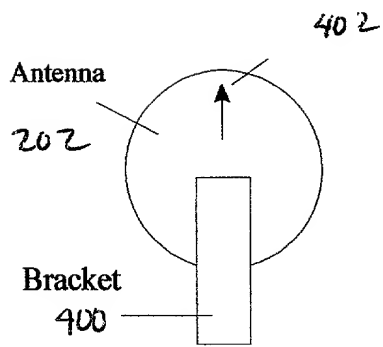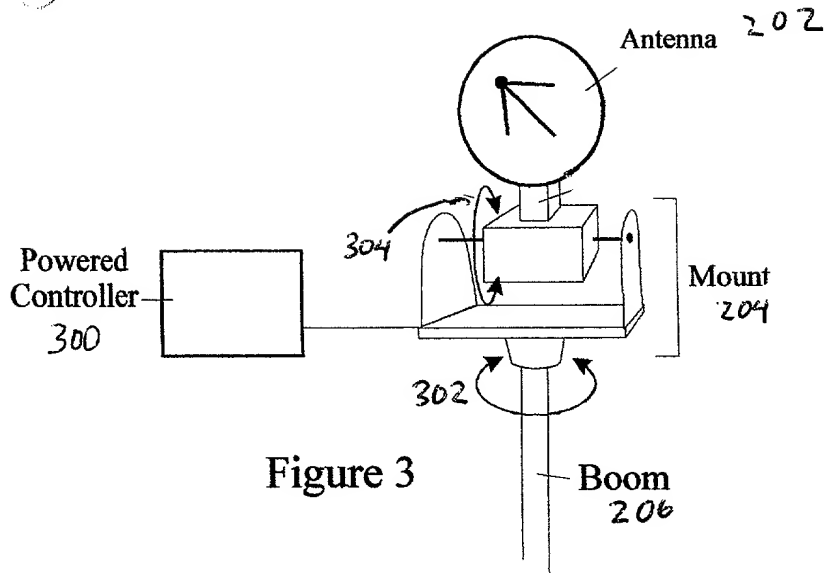

006260-20497960

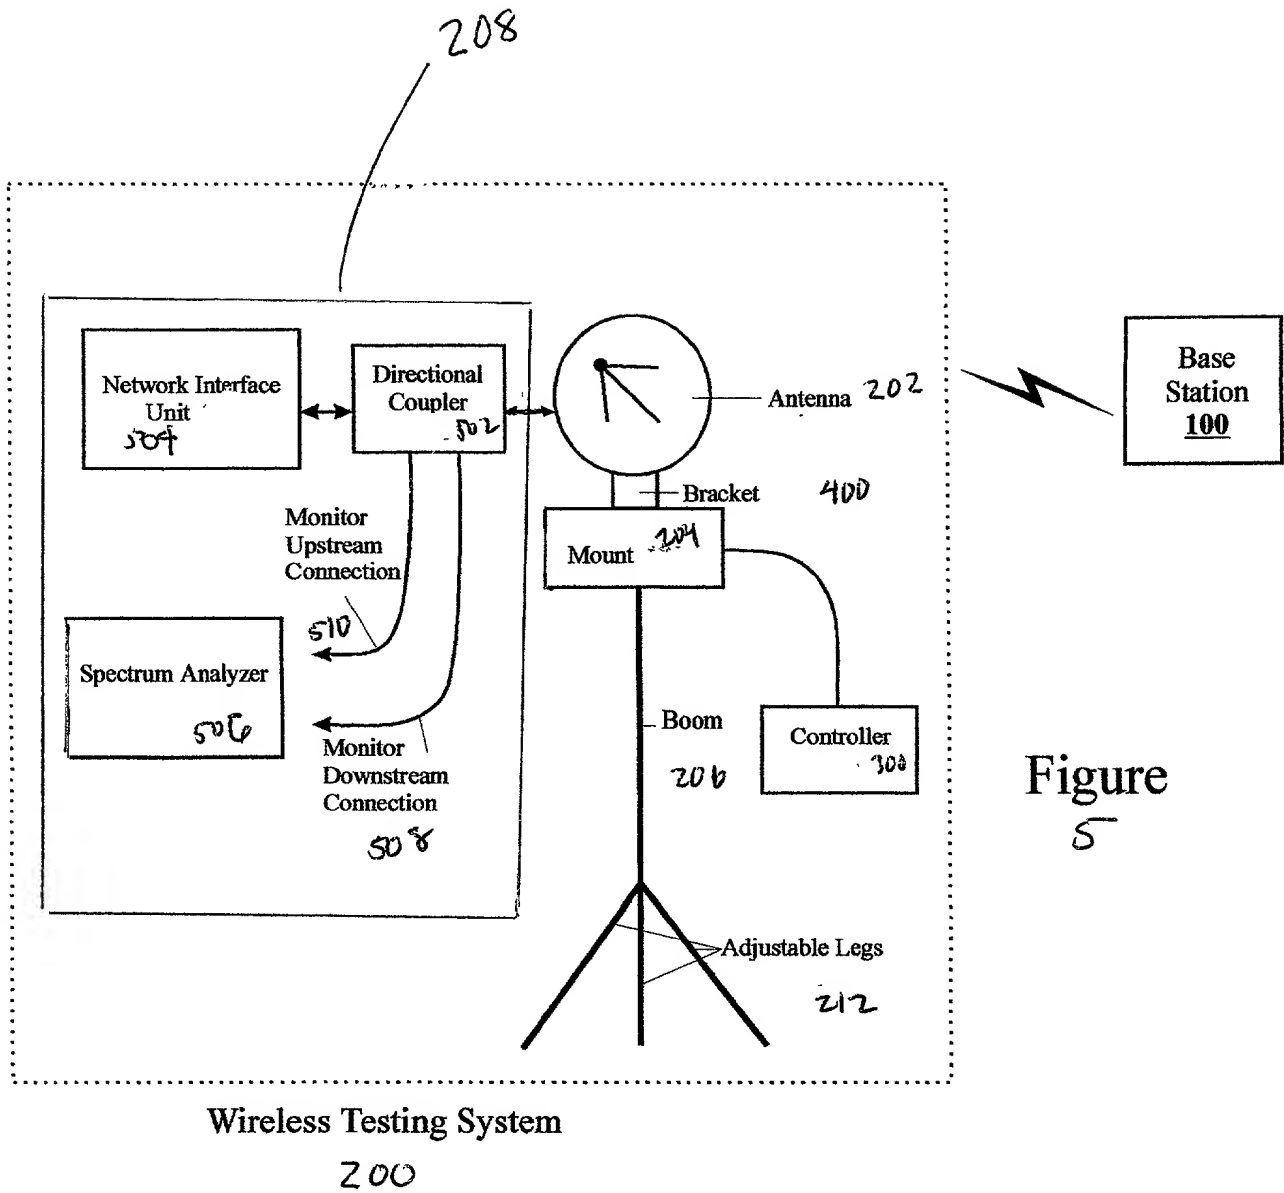


Figure  
5

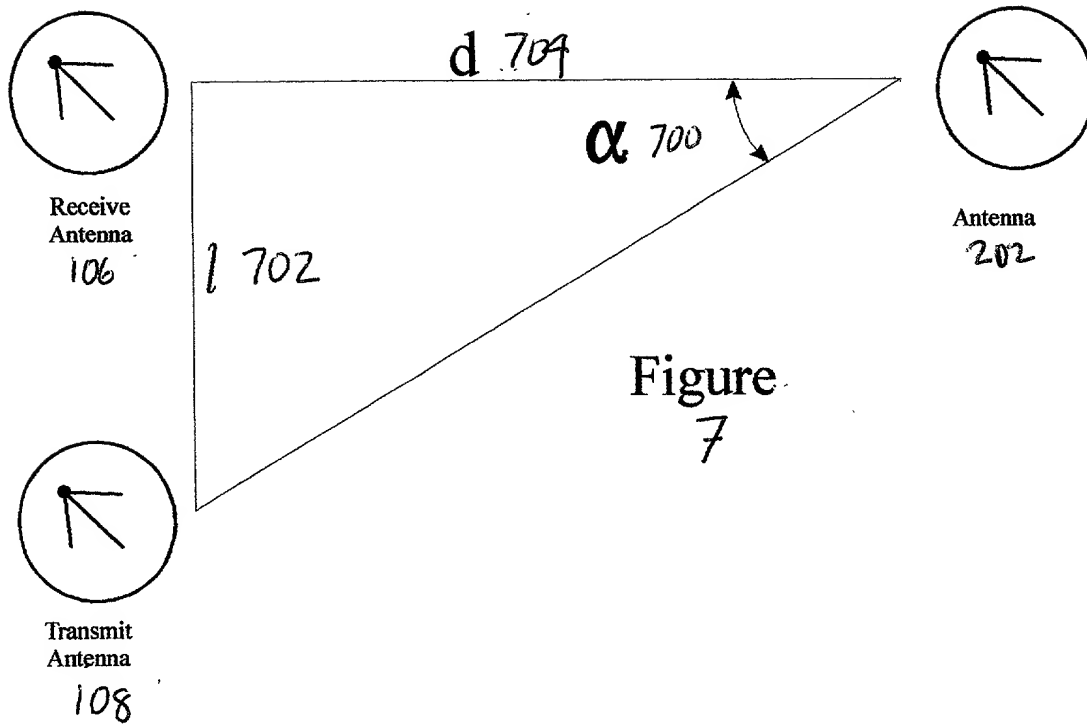


Figure  
7

005260 20494960

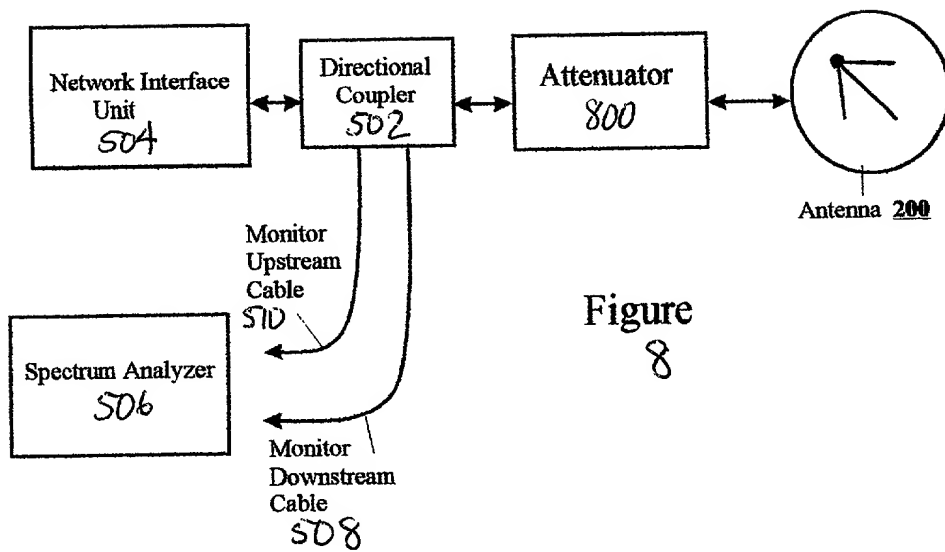


Figure 8

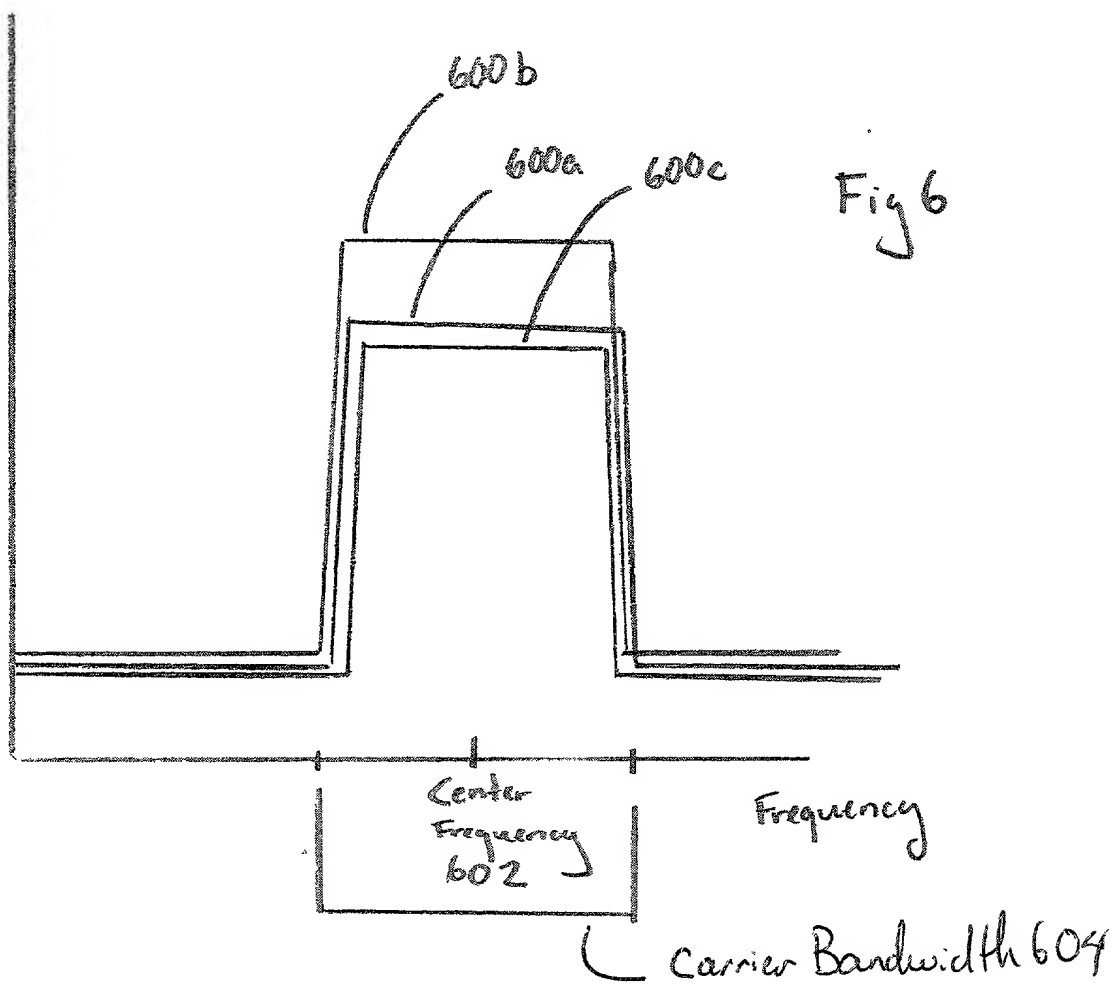


Fig 6

006260-20492960

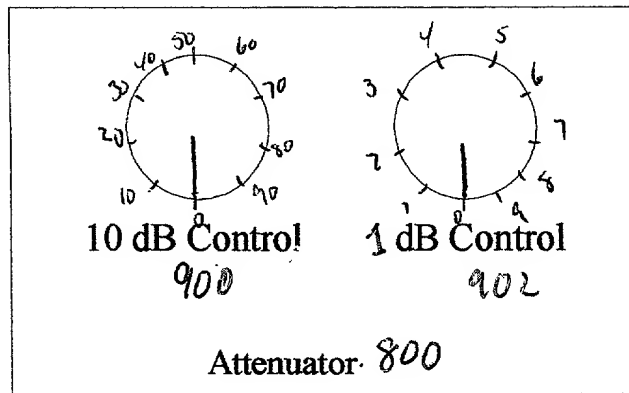


Figure 9

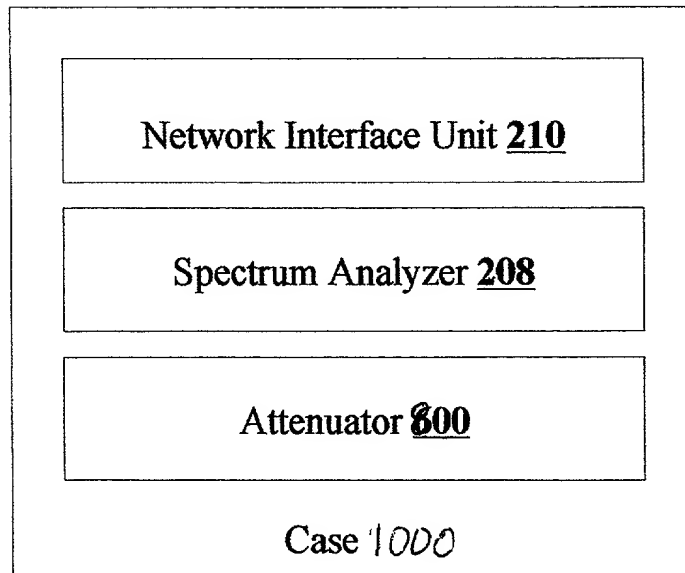


Figure 10

006250" 20492960

Attorney's Docket No.  
53921/00124

# **DECLARATION** **FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **WIRELESS TRANSMISSION EVALUATION SYSTEM AND METHOD**, the specification of which

## **Check One**

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ 88

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendments specifically referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119(a) - (d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Application No.	Country	Date of Filing	Priority Yes✓	Claimed No✓

I hereby claim the benefit under 35 U. S.C. 119(e) of any United States provisional application(s) listed below:

Application No.	Date of Filing	Priority Yes✓	Claimed No✓

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Date of Filing	Status - Patented, Pending or Abandoned

006260-20492960

- 2 -

201	FULL NAME OF INVENTOR	First Name Douglas		Middle Initial(s) Allan	Last Name DAVIES	
	RESIDENCE	City Mississauga	State/Province Ontario	Country Canada	Citizenship Canada	
	POST OFFICE ADDRESS	3510 Burningoak Crescent	City Mississauga	State/Province Ontario	Country Canada	Zip Code L4Y 3L5

202	FULL NAME OF INVENTOR	First Name		Middle Initial(s)	Last Name	
	RESIDENCE	City	State/Province	Country	Citizenship	
	POST OFFICE ADDRESS		City	State/Province	Country	Zip Code

203	FULL NAME OF INVENTOR	First Name		Middle Initial(s)	Last Name	
	RESIDENCE	City	State/Province	Country	Citizenship	
	POST OFFICE ADDRESS		City	State/Province	Country	Zip Code

204	FULL NAME OF INVENTOR	First Name		Middle Initial(s)	Last Name	
	RESIDENCE	City	State/Province	Country	Citizenship	
	POST OFFICE ADDRESS		City	State/Province	Country	Zip Code

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 201	<i>D. Davies</i>
Date	<i>Sept 28/00</i>
Signature of Inventor 202	
Date	

Signature of Inventor 203	
Date	
Signature of Inventor 204	
Date	

Signatures should conform to names as presented at 201 et seq. Above

006260" 20494960

Attorney's Docket No.  
53921/124

**POWER OF ATTORNEY**

I, **Douglas Allan Davies**, owner of the application for United States Letters of Patent for **WIRELESS TRANSMISSION EVALUATION SYSTEM AND METHOD** (Title)

by Douglas Allan Davies  
(Inventor)

- ☒ executed on even date herewith, or  
☐ having Serial No.

do hereby appoint as attorneys of record with full power of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith Brian W. Gray, Reg. No. 30,017; Sheldon Burshtein, Reg. No. 32,851; John C. Hunt, Reg. No. 36,424; Alfred A. Macchione, Reg. No. 40,333; Kenneth L. Bousfield, Reg. No. 40,460; Alexander Porat, Reg. No. 43,372; Robert H. Wilkes, Reg. No. 33,090; Robert H. Nakano, Reg. No. 46,498,

Please direct all communications to the following address

**BLAKE, CASSELS & GRAYDON LLP**  
Box 25, Commerce Court West  
199 Bay Street,  
Toronto, Ontario  
M5L 1A9  
Canada

Attention: Robert H. Nakano  
Tel.: 416.863.2785 Fax: 416.863.2653

I, the undersigned, declare that I am the (an) owner of the above-identified application or, if the owner is a corporation, partnership or other association, I am authorized to make this appointment on behalf of the owner and I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of Owner	Douglas Allan Davies
Post Office Address	3510 Burningoak Crescent, Mississauga, Ontario, Canada L4Y 3L5
Signature	Date
<i>D. Davies</i>	<i>Sept 28/00</i>